pagoda



PAGODA is a stylish new solution from **OE** Electrics for supplying user accessible AC power, USB charging, data and AV connections to the conference table.

Not just stylish and functional but quick to install; PAGODA simply clamps to a standard 80mm grommet hole.

It's high quality finish defines PAGODA; the single piece curved top available in brushed stainless steel. Specify PAGODA with one of our LED feature lighting options for an even more distinctive look.

As standard PAGODA is supplied with 2 x 4 gang POWERUNITS for power outlets and 3 keystone apertures (for data/AV outlets) and VGA and Audio in each end of the unit respectively. Blank ends are available if data and/or AV are not required.






OE House, Thomas Maddison Lane, Calder Park, Wakefield, West Yorkshire, WF4 3GH Tel: +44 (0) 1924 367255 Fax: +44 (0) 1924 290652 Email: sales@oeelectrics.co.uk www.oeelectrics.com

technical

Common Modular Components*



Keystone components








*See website for more


*See website for more

Technical details

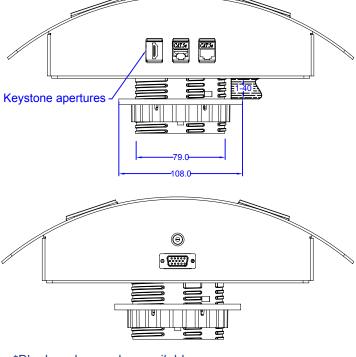

*Blank ends are also available

Cutout Dimensions



Features

Configuration:

Power only / Data only / Combined (Power & Data/AV) Internal segregation between Power and Data/AV in combined PAGODA

Insulation:

Earthed steel casing with two self enclosed fire retardant ABS POWERUNITS.

Earth Bonding:

A rewireable external earth terminal allows the removal/ change of earth bonding leads without dismantling the

Fusing: (to enable compliance to BS6396) 5 x 20mm anti-surge ceramic fuses, with colour-coded fuseclips to denote the rating (3.15A/5A) Testing:

100% testing - continuity, polarity, insulation & earth Soft Wiring (power):

Power hardwired to wieland GST connector allows starter cables to be changed to suit requirements, especially during moves or changes (CHURN)

Soft Wired Data:

As well as soft-wired power, PAGODA can accomodate soft wired data. Using our inline couplers, data cables can be changed "on-site" to accomodate changes in length often associated with churn

LED feature lighting:

Optional red, blue or green 12V LED strips with internal LED driver.


Certifications:

UL962A/CSA22.2

Installation:

PAGODA fits to a standard 80mm grommet hole in table tops up to 35mm deep, using the supplied clamp 80 kit. Silicone rubber feet prevent damage to table surfaces.

Unit Dimensions

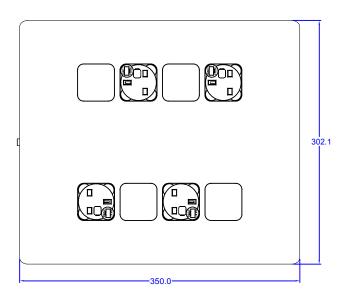

*All measurements are in millimeters

OE House, Thomas Maddison Lane, Calder Park, Wakefield, West Yorkshire, WF4 3GH Tel: +44 (0) 1924 367255 Fax: +44 (0) 1924 290652 Email: sales@oeelectrics.co.uk www.oeelectrics.com

